

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	7450	~	9450	MHz
Passband IL	/	/			1.8	dB
Ripple	/	/			1.0	dB
Rejection	DC-7.1	GHz $\geq$	75			dBc
Rejection	13.3-18	GHz $\geq$	95			dBc
Passband VSWR	/	/			1.60	


Other parameters

Connector	SMA-F Detachable Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

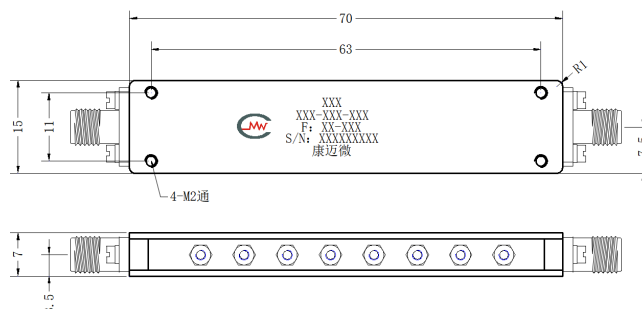

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
3	/