

Product features

It has the characteristics of wide bandwidth, low sidelobes, and high efficiency.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	1	~	4	GHz
Gain	10			dBi
VSWR		2		
3dB Beamwidth		20		°
Isolation		20		dB

Other parameters

Polarization	Dual polarization
Connector	SMA-K
Power	50W Design assurance
Outline size	505*335*335mm
Estimated weight	6Kg
Surface	Grey
Work Temp.	-25~+55°C Design assurance
Storage Temp.	-45~+75°C Design assurance

Configuration(mm)

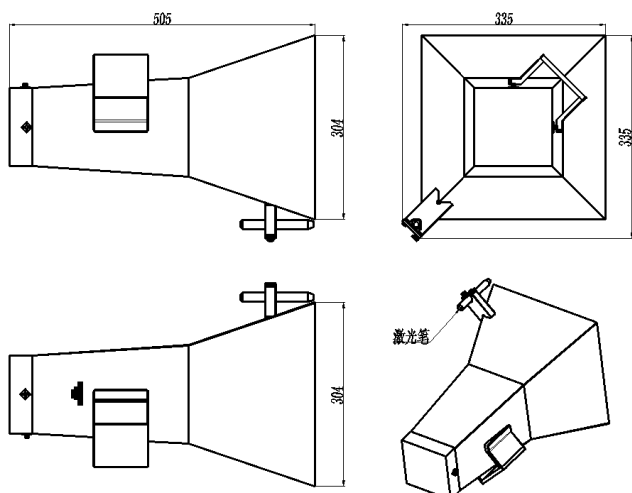

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.



Note

Avoid collisions during installation.

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.