

Main specifications

Parameters	Min	Typical	Max	Units
RF Frequency	5	~	1800	MHz
LO Frequency	5	~	1800	MHz
IF Frequency	5	~	1500	MHz
IL		13		dB
LO-RF ISO		20		dB
LO-IF ISO		20		dB
RF-IF ISO		20		dB


Other parameters

LO power	13dBm Design assurance
Impedance	50Ω
Connector	SMA-K detachable, Pin 0.38mm
Connector material	Stainless steel
Surface	Nickel plating
Operation Temp.	-40~+70°C Design assurance
Other	/


Reference picture



Configuration(mm)

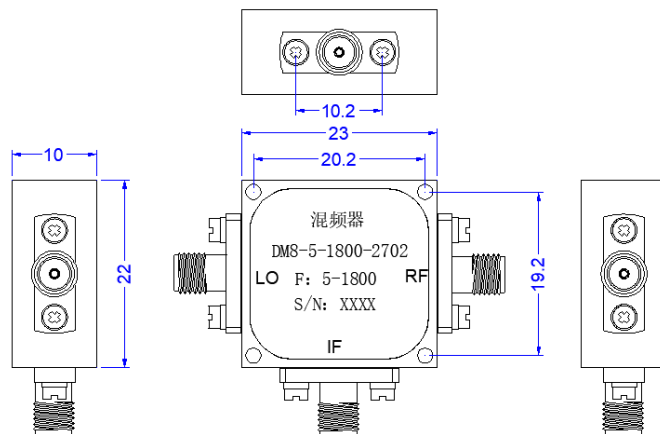

Typical test curve

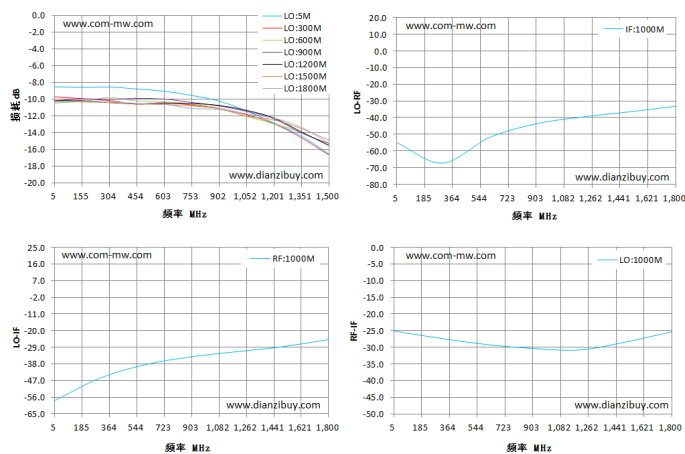

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.