

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	791	~	862	MHz
Passband IL	/	/			1.6	dB
Ripple	/	/				dB
Rejection	DC-760	MHz $\geq$	40			dB
Rejection	890-4000	MHz $\geq$	40			dB
Passband VSWR	/	/			1.5	
Return loss	/	/				dB


Other parameters

Connector	SMA-F
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	10W Design assurance
Operation Temp.	-10~+50°C Design assurance

Reference picture



Configuration(mm)

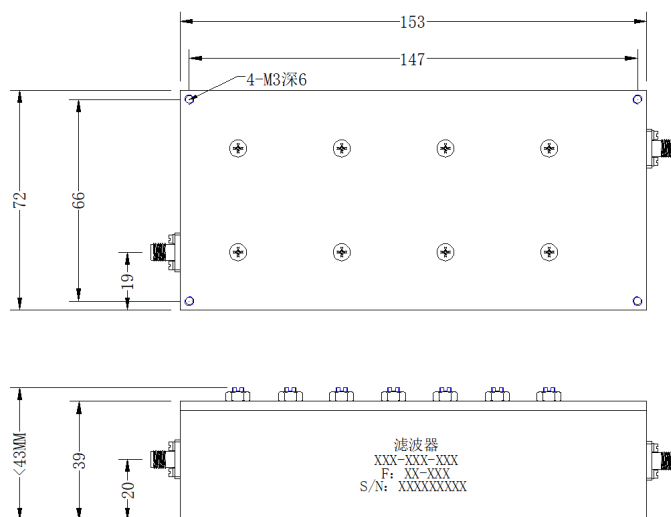

Typical test curve

