


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	25 15	~	26 15	MHz
Passband IL	/	/			1	dB
Rejection	2475	MHz $\geq$	40			dB
Rejection	2655	MHz $\geq$	40			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	Black
Operation Temp.	-40~+70°C Design assurance

Configuration(mm)

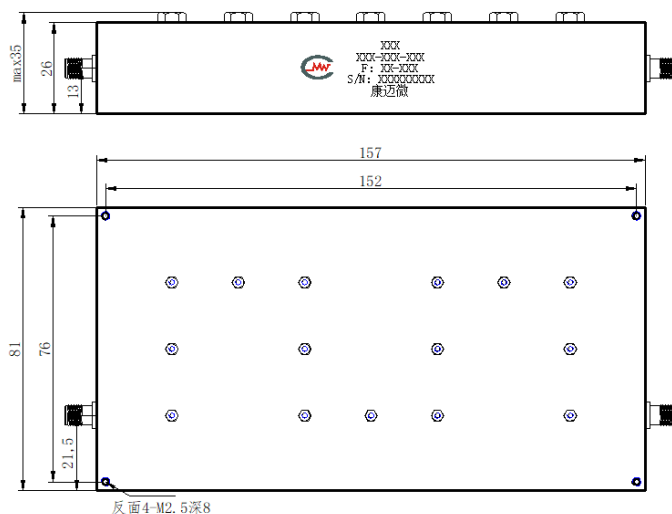

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.