


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	410	~	610	MHz
Passband IL	/	/			0.4	dB
Rejection	DC-330	MHz $\geq$	20			dB
Rejection	690	MHz $\geq$	20			dB
Rejection	820-1830	MHz $\geq$	50			dB
Passband VSWR	/	/			1.3	


Other parameters

Connector	Pin 0.8mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	400W Peak power, duty cycle 30%, pulse width 3ms Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

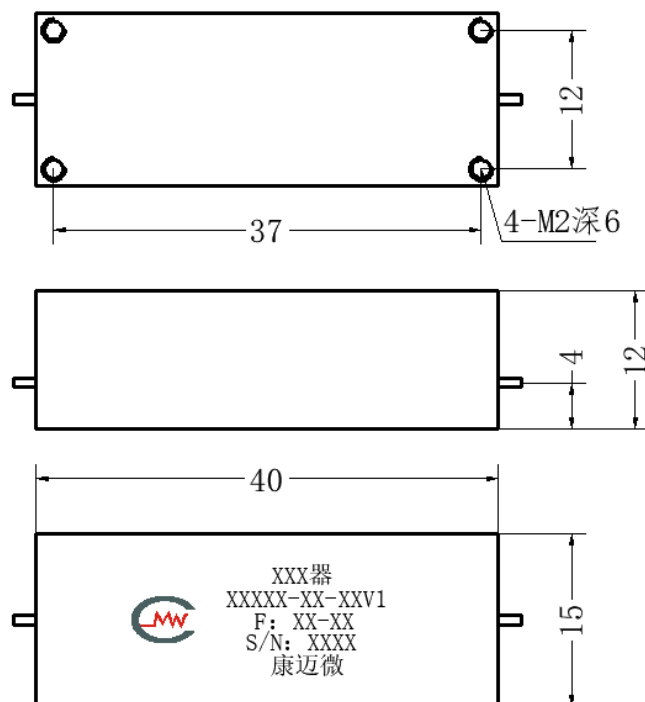

Functional diagram

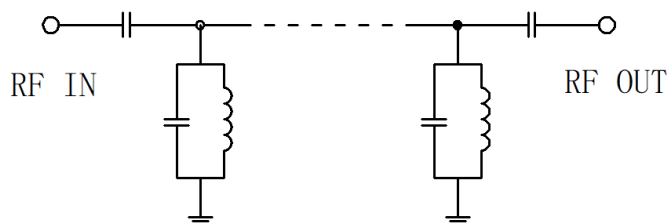

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.