


## Main specifications

| Parameters    | Frequency | /     | Min  | Typical | Max   | Units |
|---------------|-----------|-------|------|---------|-------|-------|
| Passband      | /         | /     | 6000 | ~       | 18000 | MHz   |
| Passband IL   | /         | /     |      |         | 2.0   | dB    |
| Rejection     | DC-5400   | MHz ≥ | 50   |         |       | dB    |
| Passband VSWR | /         | /     |      |         | 1.6   |       |


## Other parameters

|                    |                             |
|--------------------|-----------------------------|
| Connector          | SMA-K                       |
| Connector material | Housing 304 stainless steel |
| Impedance          | 50Ω                         |
| Surface            | White                       |
| Power Capacity     | 10W Design assurance        |
| Operation Temp.    | -10~+50°C Design assurance  |
| Storage Temp.      | -20~+60°C Design assurance  |

## Configuration(mm)

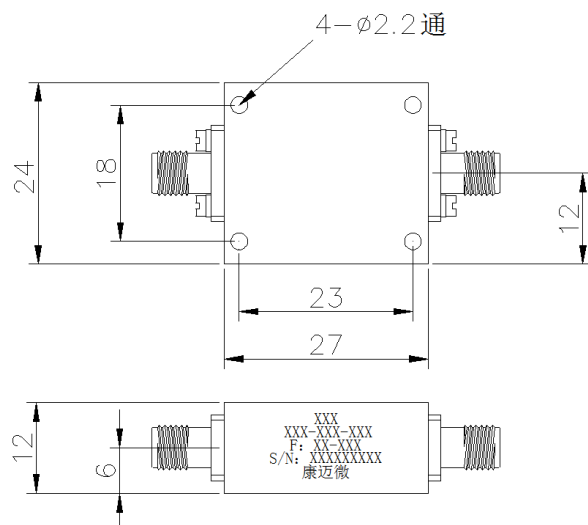

## Typical test curve

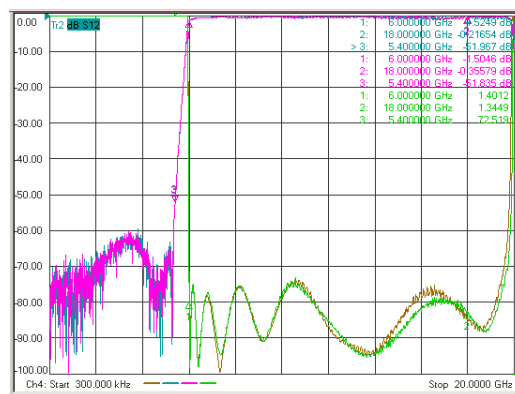

## Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.