

## Main specifications

| Parameters    | Frequency | /          | Min  | Typical | Max  | Units |
|---------------|-----------|------------|------|---------|------|-------|
| Passband      | /         | /          | 1600 | ~       | 1800 | MHz   |
| Passband IL   | /         | /          |      |         | 0.5  | dB    |
| Ripple        | /         | /          |      |         | 0.5  | dB    |
| Rejection     | DC-1400   | MHz $\geq$ | 50   |         |      | dB    |
| Rejection     | 2-5       | GHz $\geq$ | 50   |         |      | dB    |
| Passband VSWR | /         | /          |      |         | 1.50 |       |


## Other parameters

|                 |                            |
|-----------------|----------------------------|
| Connector       | N-F or K                   |
| Impedance       | 50 $\Omega$                |
| Surface         | silver-plate               |
| Power Capacity  | 260W设计保证                   |
| Operation Temp. | -40~+70°C Design assurance |
| Storage Temp.   | -55~+85°C Design assurance |


## Reference picture



## Configuration(mm)

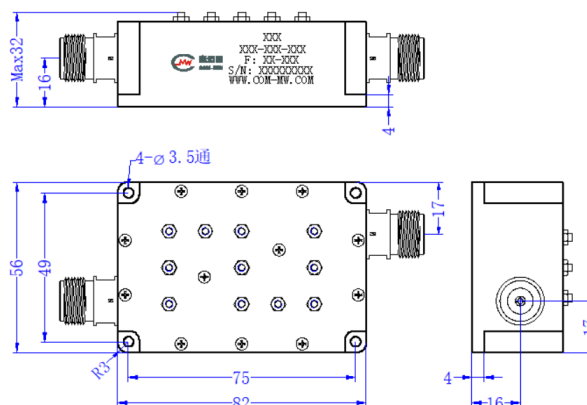

## Typical test curve

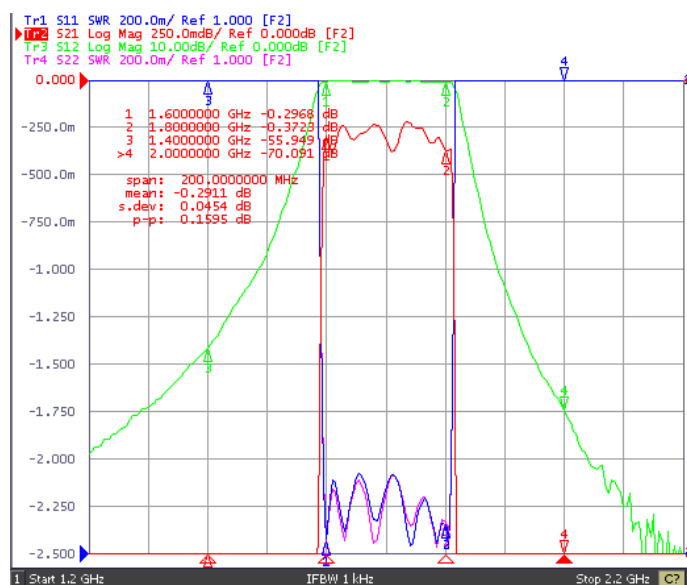

## Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /