

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2	~	2.4	GHz
Gain	40			dB
Gain flatness			±1	dB
Noise figure			2	dB
VSWR			1.5	
Spur reduction	60			dBc
P-1dB output power	0			dBm

Product Application

Connector	N -K
Connector material	Stainless steel
Impedance	50Ω
Surface	Spray three proofing paint
Operation Temp.	+5~+45°C Design assurance
other	稳定度 ≤ ±1dB/天 (设计保证)

Instructions for use

1	Power supply method	220V电源供电
---	---------------------	----------


Parts list

1	Optional	Equipped with a power adapter
---	----------	-------------------------------

Reference picture



Configuration(mm)

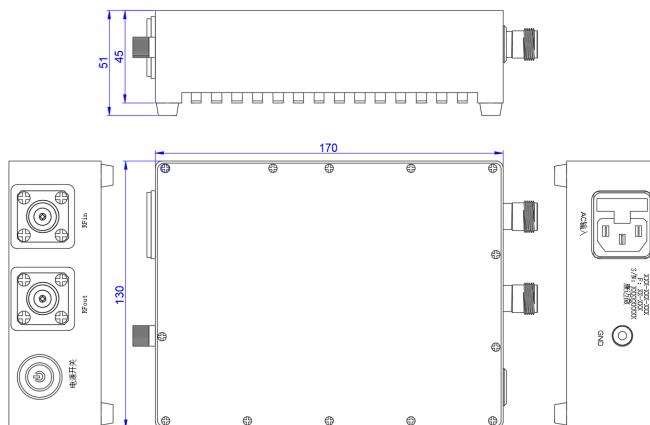

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.