


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	76 00	~	83 00	MH z
Passband IL	/	/			1.5	dB
Rejection	DC- 7250	MHz $\geq$	60			dB
Rejection	8650- 16000	MHz $\geq$	60			dB
Passband VSWR	/	/			1.5	

Configuration(mm)

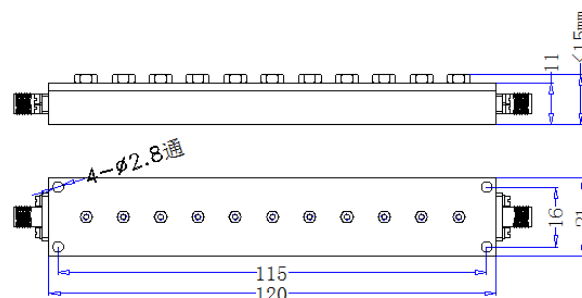

Other parameters

Connector	SMA-F
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	50W Design assurance
Operation Temp.	-10~+50°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.