


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	1700	~	1950	MHz
Passband F2	/	/	3000	~	6000	MHz
band 1 IL	/	/			0.6	dB
band 2 IL	/	/			0.6	dB
Passband VSWR F1	/	/			1.3	
Passband VSWR F2	/	/			1.6	
Band 1 Rejection	3000-6000	MHz $\geq$	70			dB
band 2 Rejection	1700-1950	MHz $\geq$	45			dB

Configuration(mm)

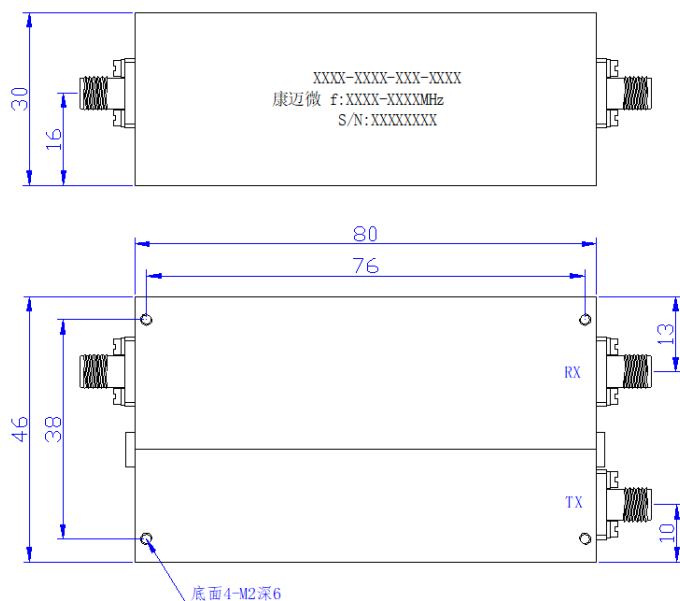



Other parameters

Connector	SMA-F
Surface	silver-plate
Power Capacity	50W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Port Definition

1	Common port	---
2	Passband 1	RX
3	Passband 2	TX
4	GND Port	---

Typical test curve

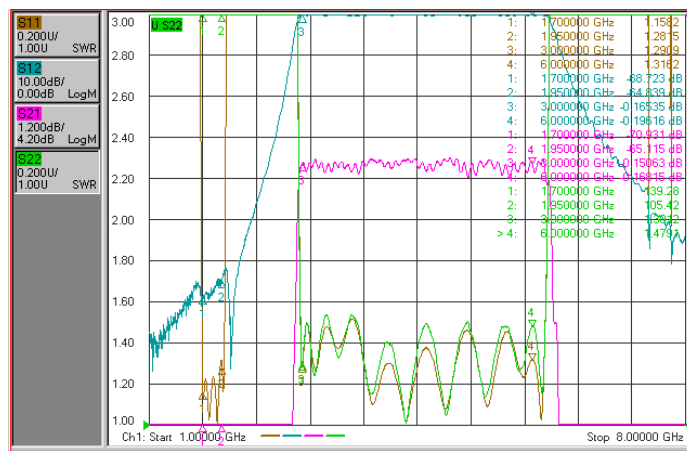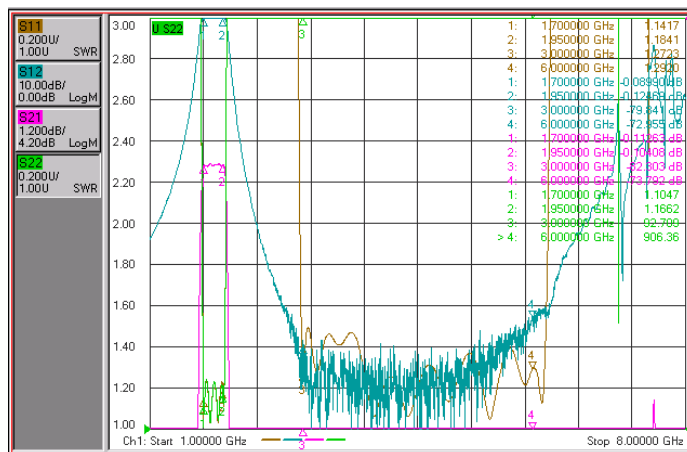

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
1	If the temperature is higher than 125°C, consult with us before ordering.