


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	point frequency	/		1450		MHz
Passband IL	/	/			6.5	dB
Rejection	DC-1300	MHz $\geq$	60			dB
Rejection	1600-1750	MHz $\geq$	70			dB
Rejection	1900-6400	MHz $\geq$	50			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Functional diagram

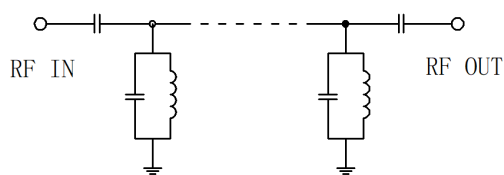

Configuration(mm)

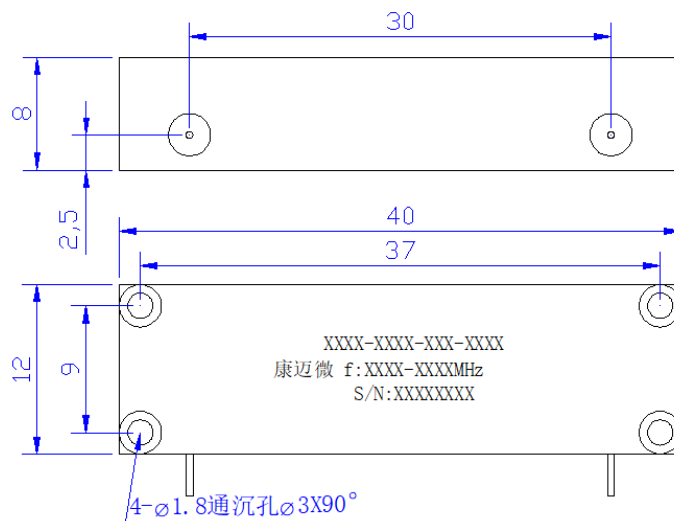

Typical test curve

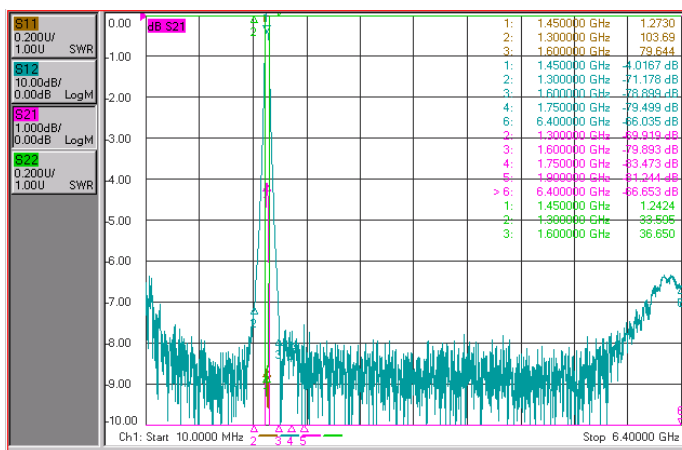

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.