

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1985	~	2165	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			0.5	dB
Rejection	DC-1875	MHz $\geq$	50			dBc
Rejection	2275-4000	MHz $\geq$	50			dBc
Rejection	4000-4300	MHz $\geq$	45			dBc
Passband VSWR	/	/			1.30	


Other parameters

Connector	SMA-MF Detachable Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

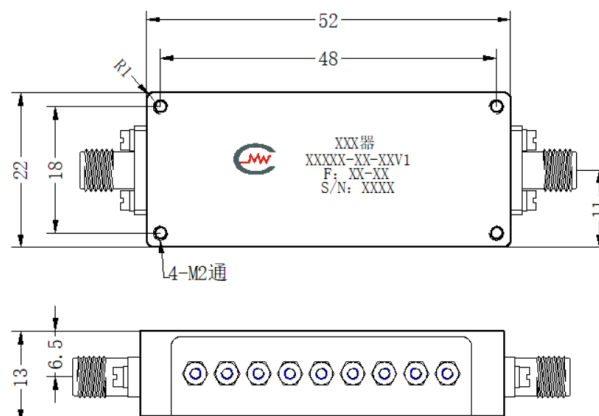

Typical test curve

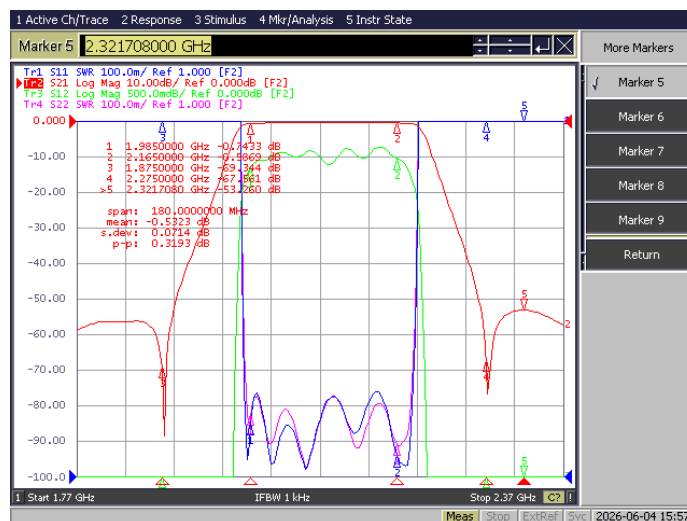

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /