


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	57 25	~	58 75	MH z
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Rejection	DC~52 75	MHz $\geq$	60			dB
Rejection	6375~1 7000	MHz $\geq$	60			dB
Passband VSWR	/	/	1.5			

Configuration(mm)

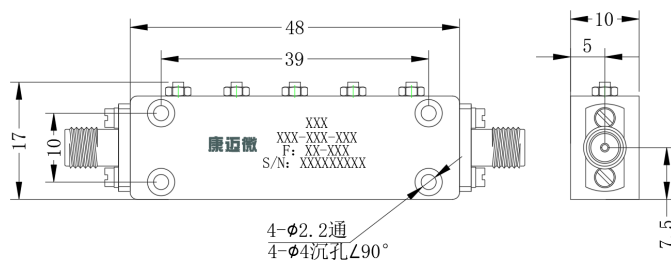

Other parameters

Connector	SMA-F or K Detachable Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Operation Temp.	-40~+80°C Design assurance
Storage Temp.	-55~+85°C Design assurance