


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	940	~	1760	MHz
Passband IL	/	/			2.5	dB
Rejection	1860-2250	MHz ≥	20			dBc
Rejection	2250-3000	MHz ≥	60			dBc
Rejection	DC-300	MHz ≥	20			dBc
Passband VSWR	/	/			1.5	

Reference picture



Configuration(mm)

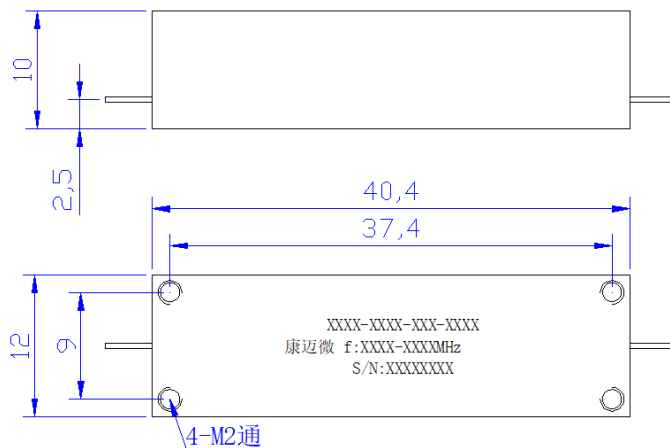

Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

