


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5855	~	6255	MHz
Passband IL	/	/			2.0	dB
Ripple	/	/			0.15	dB@任意40MHz
Rejection	DC-5455	MHz $\geq$	50			dBc
Rejection	5755	MHz $\geq$	38			dBc
Rejection	6355	MHz $\geq$	38			dBc
Rejection	6.655-13	GHz $\geq$	40			dBc
Rejection	13-18	GHz $\geq$	20			dBc
Passband VSWR	/	/			1.35	

Configuration(mm)

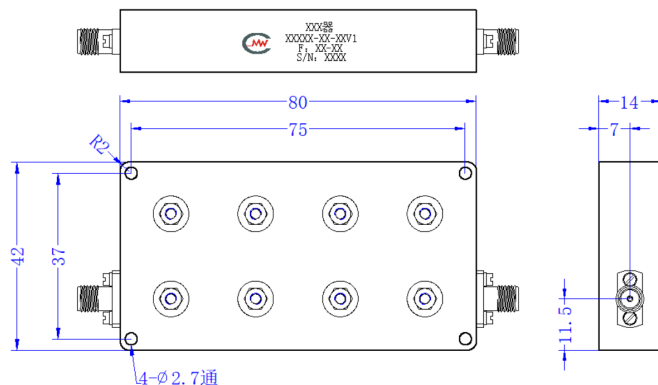

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance