

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	30	~	500	MHz
IL			3.5	dB
Isolation	18			dB
Input VSWR			1.5	
Output VSWR			1.25	
Amplitude balance			1.5	dB
Phase balance			8	°


Other parameters

Power Capacity	1W
X-Way	32 Way
Phase	0°
Impedance	50Ω
Connector	SMA-K
Connector material	Stainless steel
Surface	White
Product shell material	Aluminium
Operation Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade

Port Definition

Common port	0
Dispatch Port	1~32
GND	Case Ground

Configuration(mm)

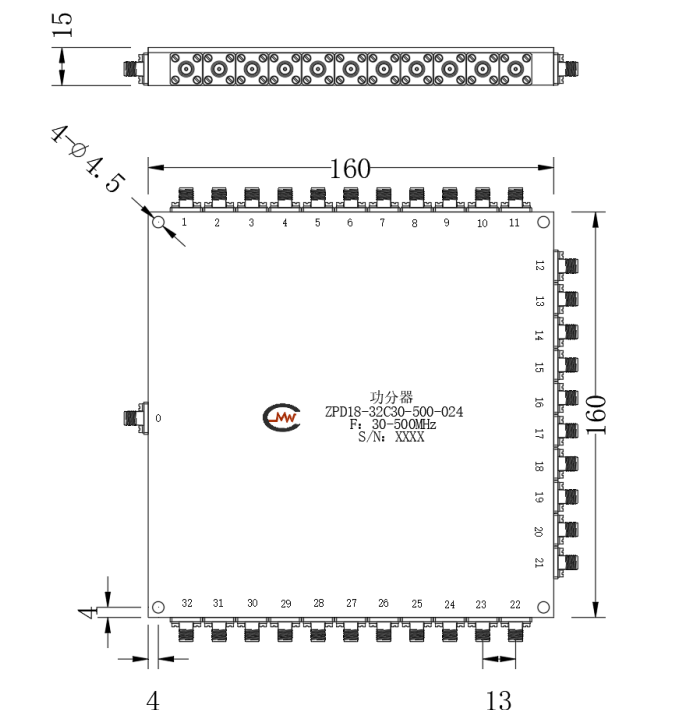

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.