


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	0.8	~	4.2	GHz
Passband F2	/	/	5.8	~	9.2	GHz
Passband VSWR					1.8	
Passband IL					3.0	dB
Ripple					1.5	dB
Band 1 Rejection	5.8-15	GHz ≥	45			dBc
band 2 Rejection	DC-4.5	GHz ≥	45			dBc
band 2 Rejection	10	GHz ≥	30			dBc
band 2 Rejection	10.8-15	GHz ≥	45			dBc

Other parameters

Connector	SMA-F or K
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

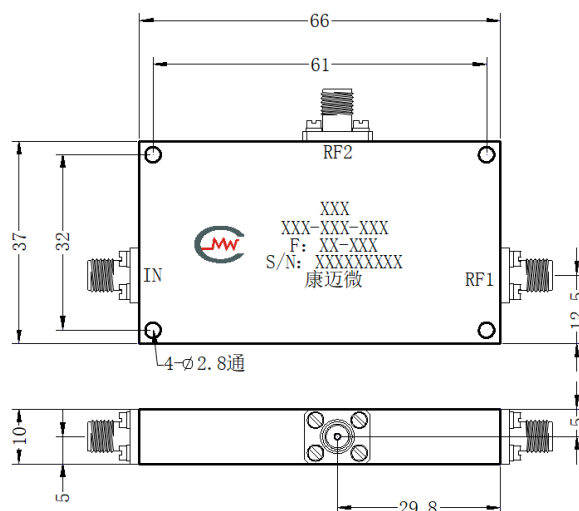

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.