


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	16.2	~	16.2	GHz
IL	/	/			3	dB
Rejection	DC~16.1	GHz $\geq$	15			dBc
Rejection	16.3~30	GHz $\geq$	15			dBc
Passband VSWR	/	/			1.5	

Configuration(mm)

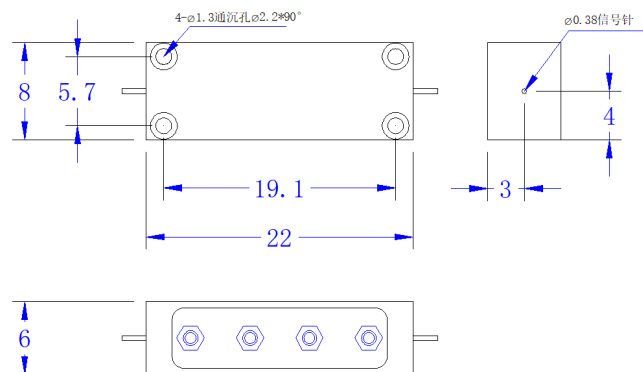

Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	White
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.