

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2000	~	4000	MHz
Passband IL	/	/			0.5	dB
Passband VSWR	/	/			1.6	
Rejection	DC-1.9	GHz $\geq$	20			dB


Other parameters

Connector	SMA-J
Impedance	50 Ω
Surface	Black
Power	10W
Phase balance	6°
Work Temp.	-30~+60°C Design assurance
Other	Amplitude consistency 0.2dB

Reference picture



Configuration(mm)

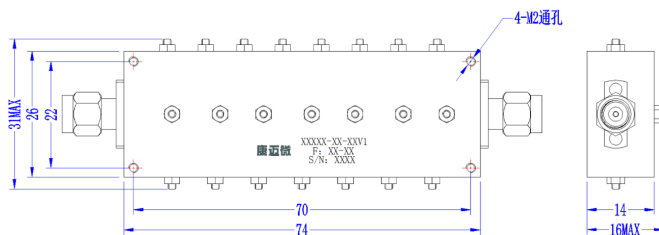

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.