

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	950	~	2150	MHz
IL			4.0	dB
Equilibrium quantity		7		dB
VSWR			1.5	dB


Other parameters

Power Capacity	1W Design assurance
Impedance	50Ω
Connector	SMA-MF
Connector material	Stainless steel
Surface	silver-plate
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

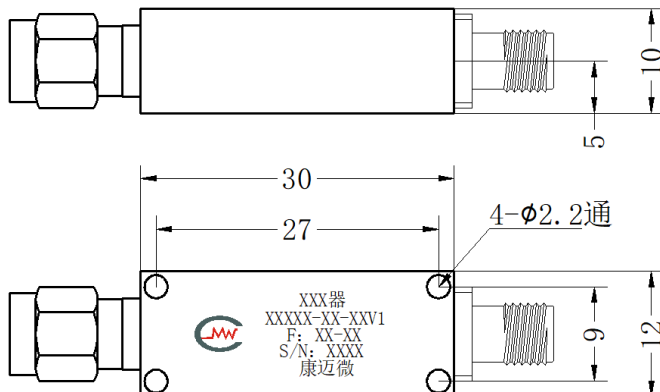

Typical test curve

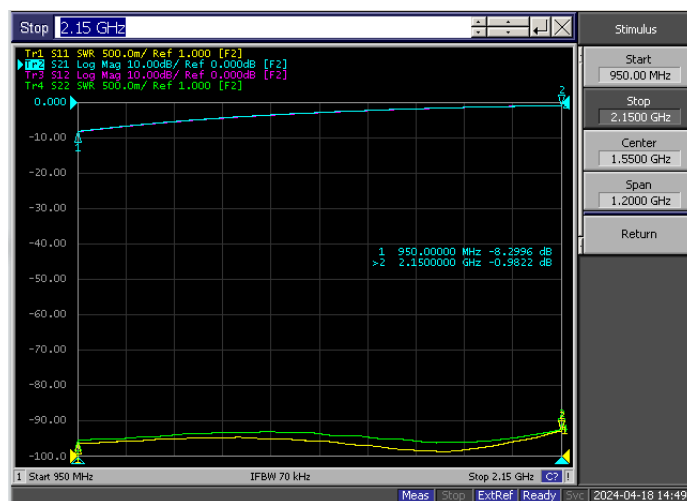

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.