

Characteristics and Application

Low temperature drift, high power.

Small size, easy to integrate.


Technical parameters superior to LTCC filters.

Applied in fields such as radar, electronic countermeasures, and mobile communication.

Reference picture



Schematic diagram

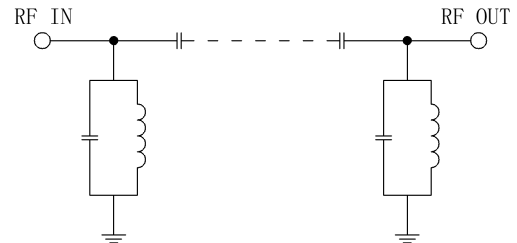


Tech specifications

Items	Parameters	Units
Center Frequency	9.1	GHz
Bandwidth	8.65-9.55	GHz
Passband IL	3.0	dB
Ripple	1.5	dB
VSWR	1.7:1	
Group delay ripple	0.6	ns
Rejection	45@DC-6.0GHz	dB
Rejection	35@6.0-7.9GHz	dB
Rejection	35@10.8-18.0GHz	dBc


Other requirement (Design assurance)

power	5W CW
Operation Temp.	-55~+85°C
Storage Temp.	-55~+85°C

Configuration

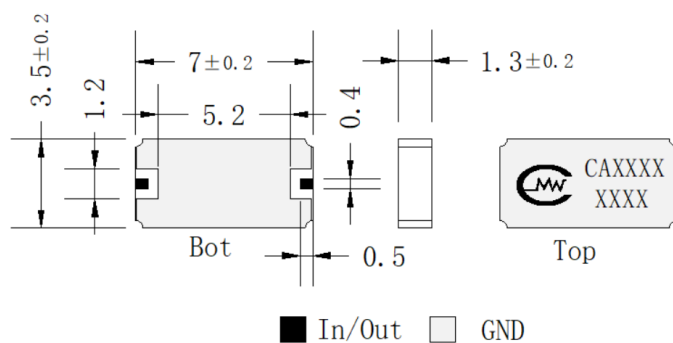

Suggested PCB Layout

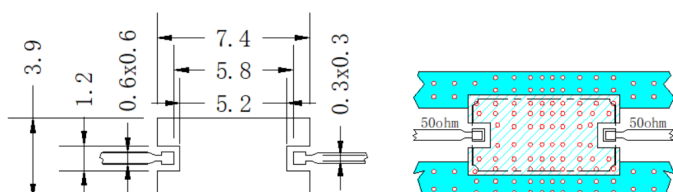


Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

1. It is recommended to use it separately, with a distance of 1mm from the side wall and 2mm from the upper cover, It supports 260 °C reflow soldering;
- 2: Grounding is very important, only good grounding can maximize the performance of the filter;
- 3: During the cleaning process, the filter should not be immersed in the cleaning solution for a long time;
- 4: Filling absorbing material above the filter can achieve better harmonic suppression.

Typical test curve

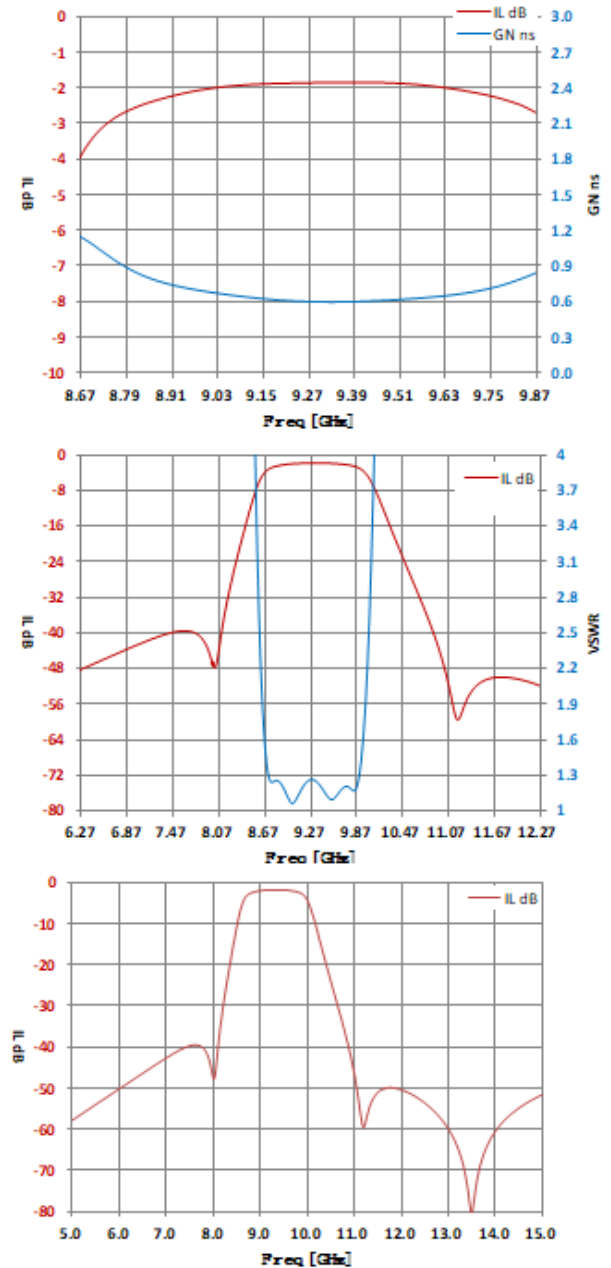

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.