


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	32.9	~	36.1	GHz
Center loss	/	/			3	dB
Ripple	/	/			1	dB
Rejection	DC-30	GHz $\geq$	70			dB
Rejection	39-43	GHz $\geq$	50			dB
Return loss	/	/			15	dB

Configuration(mm)

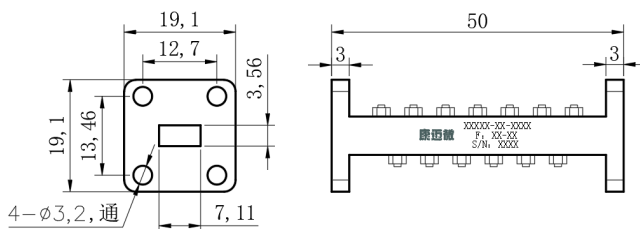

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	Waveguide
Waveguide port	BJ320
Waveguide flange	FBP320
Surface	silver-plate
Power Capacity	50W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance