

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	7.4	~	9.1	GHz
Passband IL	/	/			2.0	dB
Ripple	/	/			0.5	dB
Rejection	DC-6.3	GHz $\geq$	65			dBc
Rejection	10.2-14.8	GHz $\geq$	65			dBc
Rejection	14.8-18.2	GHz $\geq$	70			dBc
Passband VSWR	/	/			1.5	



Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Delay ripple	$\leq$ 1.3ns
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

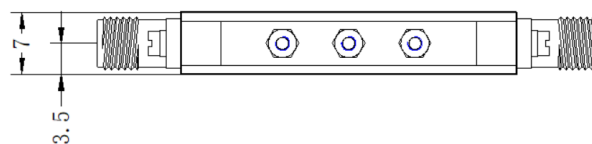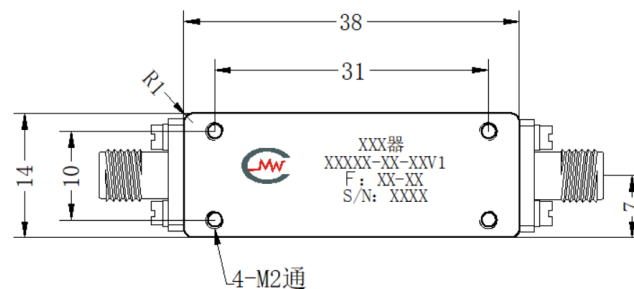

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.