


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	210		230	MHz
Passband IL	/	/		3.0		dB
1dB BW	20	MHz				
Rejection	DC-190	MHz $\geq$	28			dBc
Rejection	200	MHz $\geq$	15			dBc
Rejection	240	MHz $\geq$	10			dBc
Rejection	250	MHz $\geq$	28			dB
Rejection	260	MHz $\geq$	38			dB
Rejection	270-500	MHz $\geq$	43			dB
Passband VSWR	/	/			1.5	

Reference picture



Configuration(mm)

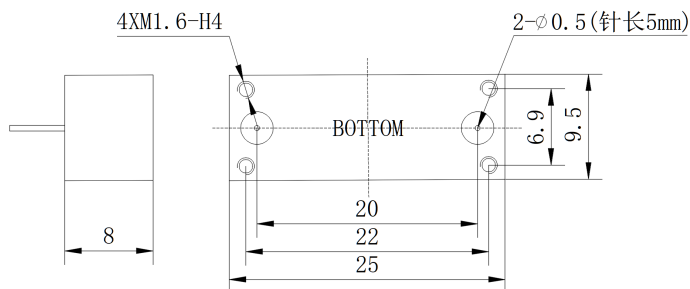

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
3	/

Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Product shell material	Copper
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-50~+80°C Design assurance
Quality Grade	Industrial grade

Functional diagram

