


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	2	~	18	GHz
IL		10.0	10.3	dB
Isolation	16	18		dB
Input VSWR		1.7	1.90	
Output VSWR		1.5	1.70	
Amplitude balance			±1	dB
Phase balance			±8	°

Other parameters

Power Capacity	20W Design assurance
way	6-way
Impedance	50Ω
Connector	SMA-K
Connector material	Stainless steel
Surface	Grey
Product shell material	Aluminium
Operation Temp.	-55~+85℃

Configuration(mm)

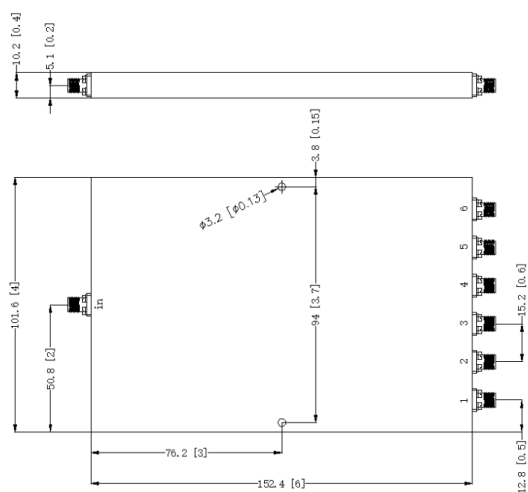

Note

- | | |
|---|--|
| 1 | Clean the surface of the product, do not soak the product in cleaning solution for cleaning. |
| 2 | If the temperature is higher than 125°C, consult with us before ordering. |

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.