

Product features

Broadband, high-power.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	8	~	21	GHz
IL			1.3	dB
Coupling	9	10	11	dB
Directivity	15			dB
Main line VSWR			1.5	
Coupled line VSWR			1.5	


Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Power Capacity	25W Design assurance
Shell Material	Aluminium
Operation Temp.	-40~+85°C Design assurance

Reference picture



Configuration(mm)

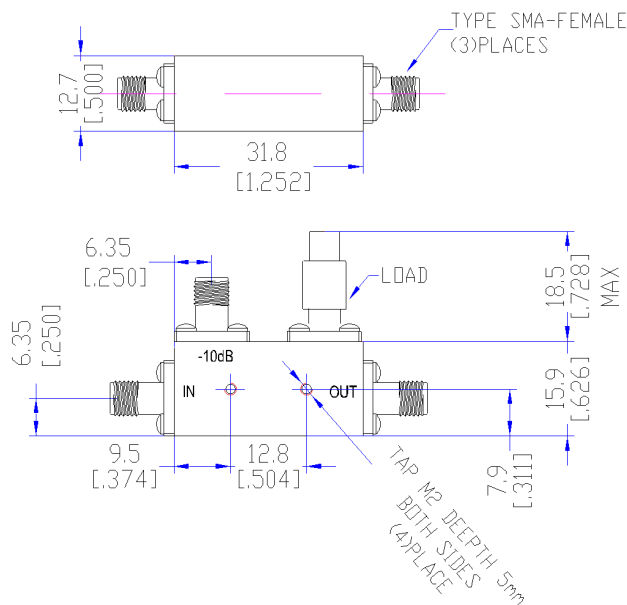

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.