

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	18	GHz
VSWR		1.15	1.2	


Other parameters

Power	2W Design assurance
Impedance	50Ω
Connector	Flat pin
Surface	Nickel plating
Product shell material	Copper
Work Temp.	-30~+70°C Design assurance

Note

When installing the load, it is necessary to consider sufficient heat dissipation space and not install it next to equipment with high heat output.

Power Derating Curve

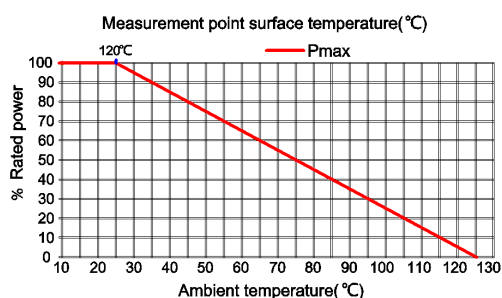

Reference picture



Configuration(mm)

