

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	13.75	~	14.5	
Passband IL	/	/			0.35	dB
Rejection	27.5-29	GHz ≥	60			dBc
Coupling			29.3	30	30.7	dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	Waveguide
Waveguide port	BJ140
Waveguide flange	FBP140
Surface	silver-plate
Power Capacity	100W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Other	Coupling port SMA-F

Reference picture



Configuration(mm)

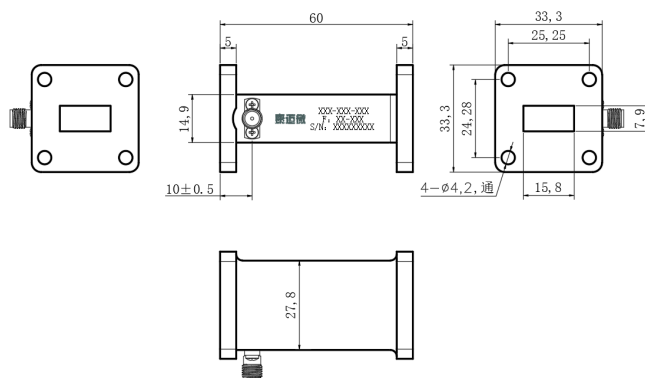

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.