


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5733.5	~	5736.5	MHz
Passband IL	/	/			5.5	dB
Ripple	/	/			1	dB
Rejection	5735 $\pm$ 255	MHz $\geq$	90			dBc
Rejection	DC~5209	MHz $\geq$	70			dBc
Rejection	5735 $\pm$ 35.6	MHz $\geq$	65			dBc
Passband VSWR	/	/			1.5	

Configuration(mm)

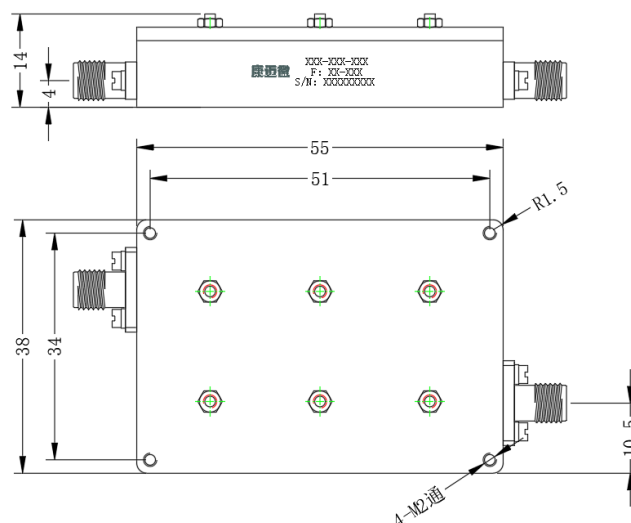

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-F Detachable Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Other	Weight about 260g