



Main specifications

Parameters	Min	Typical	Max	Units
Frequency	90	~	8000	GHz
IL			1@8000MHz	dB
Equilibrium quantity		5		dB
VSWR			1.18	dB

Other parameters

Power Capacity	+30dBm 设计保证
Impedance	50Ω
Connector	SMA-JK
Surface	Conductive oxidation
Operation Temp.	-20~+60°C Design assurance

Configuration(mm)

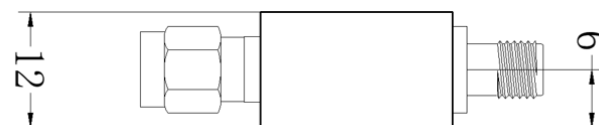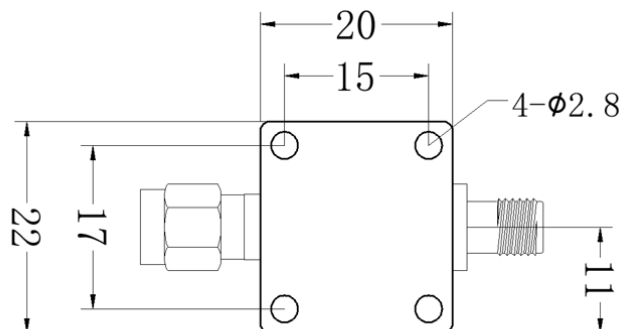

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.