

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	1000	MHz
IL			6.5	dB
Isolation	6			dB
Input VSWR			1.6	
Output VSWR			1.5	
Amplitude balance			0.5	dB
Phase balance			5	°

Other parameters

Power	1W Design assurance
way	2-way
Phase	0°
Impedance	50Ω
Connector	BNC-F
Product shell material	Aluminium
Work Temp.	-10~+50°C Design assurance
Storage Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade


Port Definition

Common port	0
Dispatch Port	1、2

Reference picture



Configuration(mm)

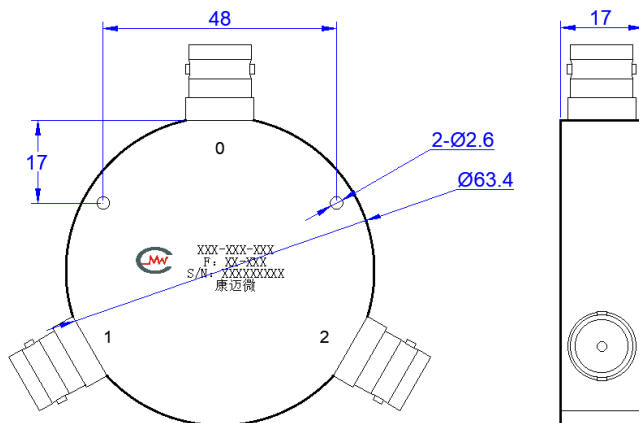

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.