


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	69 10	~	69 32	MHz
Passband IL	/	/			3	dB
Ripple	/	/			2	dB
Rejection	F0±22	MHz ≥	20			dBc
Rejection	F0±44	MHz ≥	50			dBc
Passband VSWR	/	/	1.5			

Other parameters

Connector	SMA-F Detachable Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Operation Temp.	-10~+50°C Design assurance
Storage Temp.	-30~+70°C Design assurance

Configuration(mm)

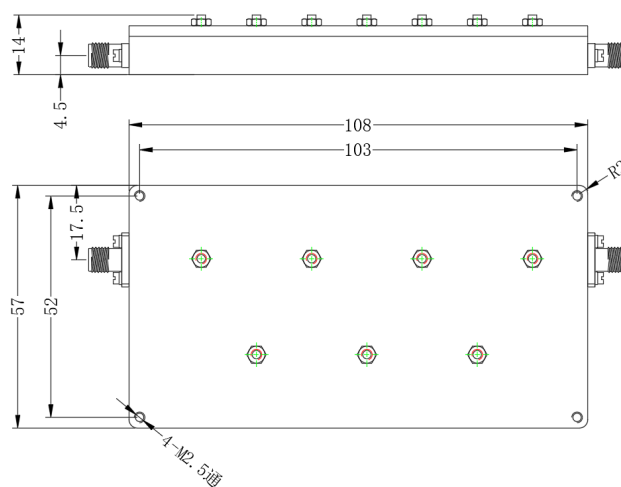

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.