

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	20 25	~	21 20	MHz
Passband IL	/	/			1.0	dB
Ripple	/	/			0.7	dB
Rejection	DC-1.8	GHz $\geq$	40			dBc
Rejection	2.2-2.3	GHz $\geq$	40			dBc
Rejection	二次, 三次谐波	GHz $\geq$	45			dBc
Rejection	8.2-9.2	GHz $\geq$	70			dBc
Passband VSWR	/	/			1.5 0	


Other parameters

Connector	SMA-F Detachable Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Delay ripple	
Delay ripple	
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

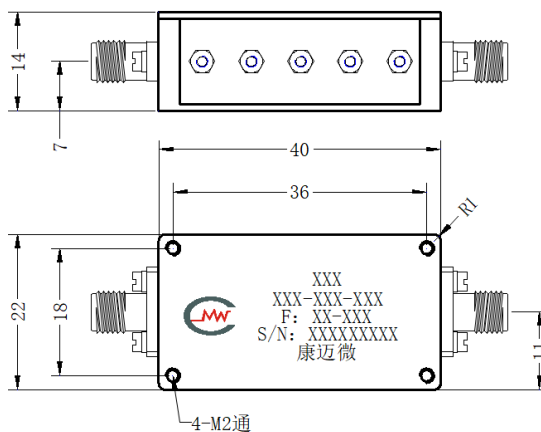

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /