

Product features

Broadband, small volume.

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	8	GHz
Attenuation	6.4	7	7.6	dB
VSWR			1.3	


Other parameters

Power Capacity	5W
Impedance	50Ω
Connector	N -JK
Connector material	Shell copper
Surface	Black
Product shell material	Aluminium
Operation Temp.	-40~+85°C Design assurance

Reference picture



Configuration(mm)

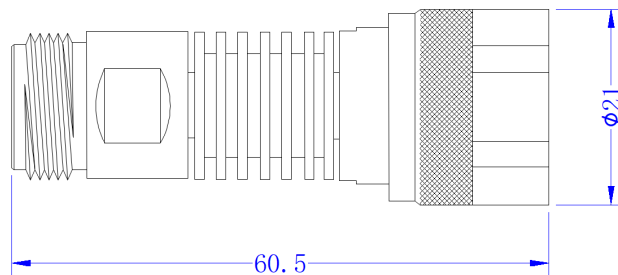

Note

When installing attenuators, sufficient heat dissipation space should be considered to avoid being installed next to equipment with high heat output.

Small power attenuators do not have input and output directions, nor do they indicate directions. When high-power attenuators have input and output port markings, connect devices in the specified direction.