


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	1145	~	1310	MHz
Passband F2	/	/	1530	~	1635	MHz
band 1 IL	/	/			0.6	dB
band 2 IL	/	/			0.6	dB
Passband VSWR	/	/			1.5	
Band 1 Rejection	1.53-1.635	GHz ≥	65			dB
Band 1 Rejection	2.29-3.93	GHz ≥	55			dB
band 2 Rejection	1.145-1.31	GHz ≥	65			dB
band 2 Rejection	3.06-4.905	GHz ≥	55			dB
Channel isolation			65			dB

Configuration(mm)

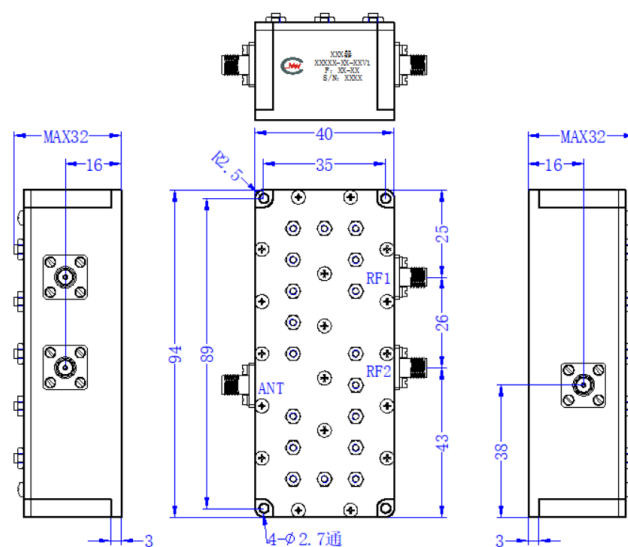

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.

Other parameters

Connector	SMA-K detachable, Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	60W Design assurance

Port Definition

1	Common port	ANT
2	Passband 1	RF1
3	Passband 2	RF2

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.