


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	265	~	275	MHz
Passband IL	/	/			4.0	dB
Ripple	/	/			1.0	dB
Rejection	DC-240	MHz $\geq$	65			dB
Rejection	300-900	MHz $\geq$	65			dB
Passband VSWR	/	/			1.5	

Configuration(mm)

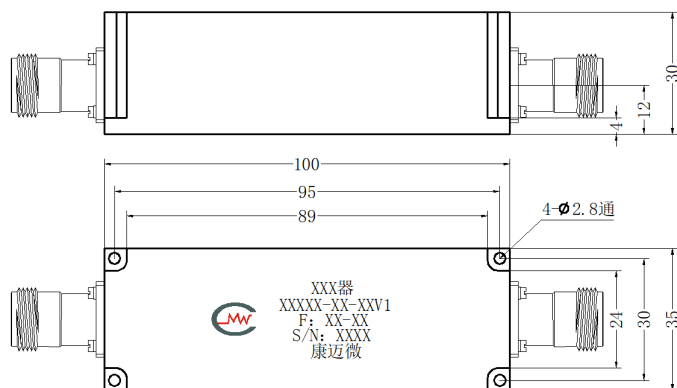

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.

Other parameters

Connector	N-K
Impedance	75 Ω
Surface	Black baking paint
Product shell material	Aluminium
Work Temp.	-40~+70°C

Functional diagram

