


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband F1	/	/	2	~	2.12	GHz
Passband F2	/	/	2.2	~	2.31	GHz
band 1 IL	/	/			0.8	dB
band 2 IL	/	/			0.8	dB
Passband VSWR	/	/			1.3	
Band 1 Rejection	2.2	GHz	110			dB
band 2 Rejection	DC-2.12	GHz	110			dB
band 2 Rejection	2.12-2.14	GHz	60			dB
band 2 Rejection	2.14-2.17	GHz	40			dB
band 2 Rejection	2.34	GHz	30			dB

Reference picture



Configuration(mm)

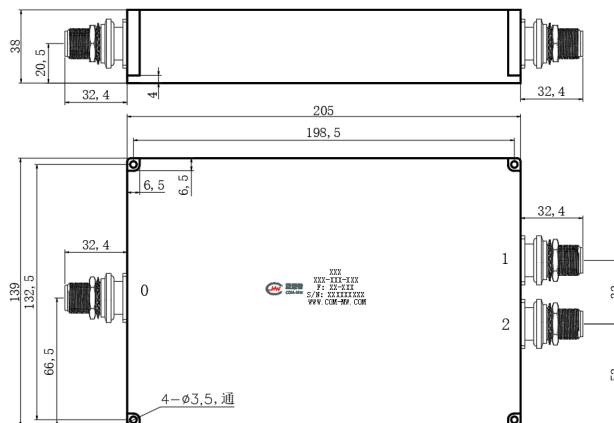

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	N-K
Impedance	50Ω
Surface	Black baking paint
Power Capacity	500W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance

Port Definition

1	Common port	0
2	Passband 1	1
3	Passband 2	2
4	GND Port	---

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.