

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	14	~	14.5	GHz
Passband IL	/	/			0.3	dB
Ripple	/	/			0.1	dB
Rejection	28-29	GHz $\geq$	30			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	Waveguide
Waveguide port	WR75
Impedance	50 Ω
Surface	White
Power	400W Design assurance
Work Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade

Reference picture



Configuration(mm)

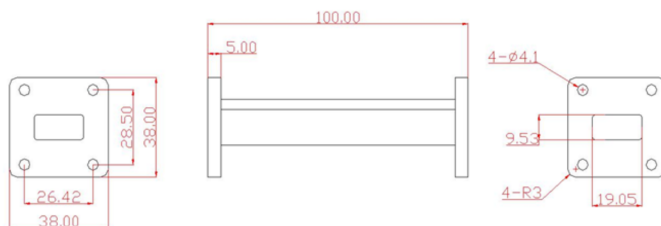

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 It is prohibited to install embedded filters on microwave multilayer boards with frequencies greater than 2000MHz after opening holes.