


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	20 00	~	23 00	MH z
Passband IL	/	/			1	dB
Ripple	/	/			0.7	dB
Rejection	DC-1.8	GHz $\geq$	50			dB
Rejection	3-5	GHz $\geq$	65			dB
Passband VSWR	/	/			1.5	

Reference picture



Configuration(mm)

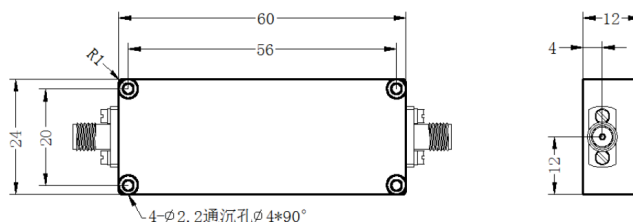

Other parameters

Connector	
Impedance	50 Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.