


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	66	~	74	MHz
Passband IL	/	/			4	dB
Ripple	/	/			1	dB
Rejection	DC-60	MHz $\geq$	35			dBc
Rejection	80-500	MHz $\geq$	35			dBc
Rejection	500-1200	MHz $\geq$	20			dBc
Passband VSWR	/	/			1.6	

Configuration(mm)

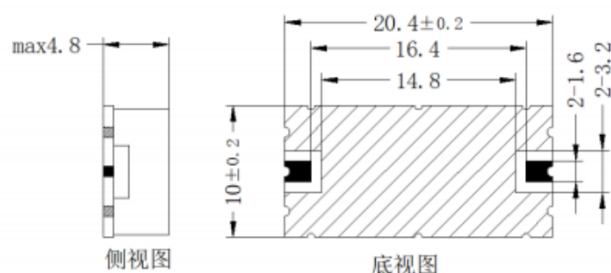

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	The product supports 220 °C reflow soldering.

Other parameters

Connector	SMD
Impedance	50Ω
Power Capacity	1W Design assurance
群时延一至性	$\leq$ 6ns (同批次)
Group delay ripple	$\leq$ 35ns
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+80°C Design assurance