


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	DC	~	50	MH z
Passband IL	/	/			1.8	dB
Ripple	/	/			1.6	dB
Rejection	70-500	MHz ≥	60			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

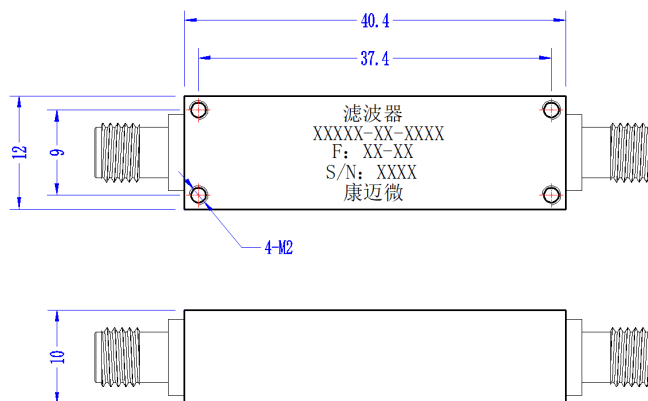

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.