


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	698	~	898	MHz
Passband IL	/	/			1.0	dB
Ripple	/	/			0.5	dB
Rejection	260-460	MHz $\geq$	65			dBc
Rejection	1300-1500	MHz $\geq$	65			dBc
Passband VSWR	/	/			1.50	


Other parameters

Connector	MCX-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	50W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

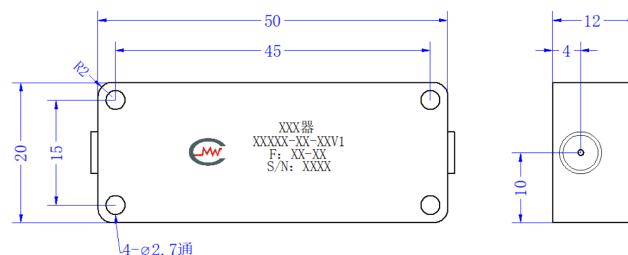

Typical test curve

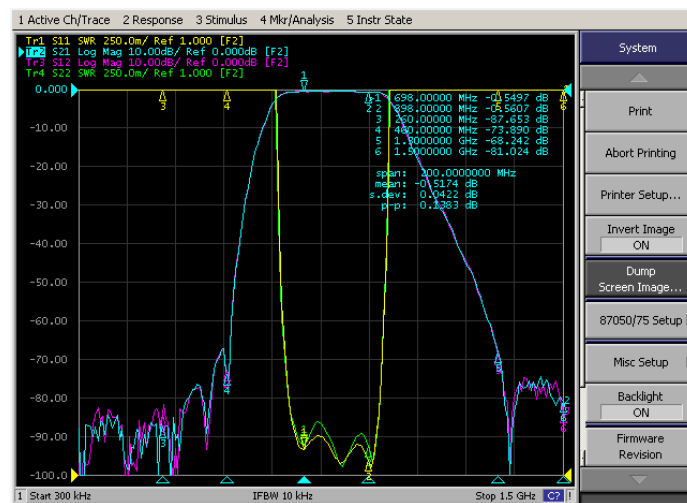

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.