

Tech specifications

Parameters	Min	Typical	Max	Units
Frequency	400	~	1000	MHz
IL		0.8		dB
Isolation		50		dB
VSWR		1.5		

Other parameters

Switch way	SPDT
Switching characteristic	Electronic reflective switch
Switch time	4000ns
Connector	SMA-K detachable, Pin 0.5mm
Impedance	50Ω
Power Capacity	200W Design assurance
Working voltage	+5V
Working current	300mA
Operation Temp.	-45~+75°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Other	需外接负压-100V


Port Definition

Common port	---J0
Branching port	---J1、J2

Truth table

控制输入	选通状态
T	J0 to:
0	J1
1	J2

Configuration(mm)

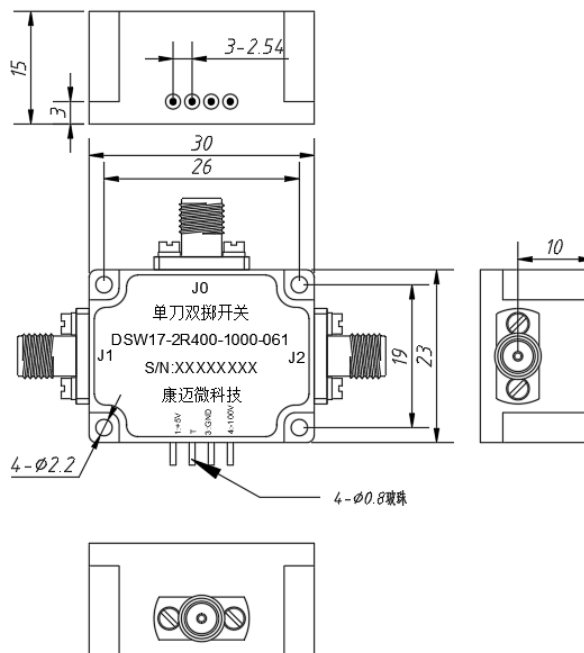

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.