

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Center Frequency	/	/		11110		MHz
Center loss	/	/			7	dB
Rejection	DC-11060	MHz $\geq$	50			dBc
Rejection	11160-14000	MHz $\geq$	50			dBc
Passband VSWR	/	/			1.5	


Other parameters

Connector	SMA-F
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Aluminium
Bandwidth	-3dB<10MHz
Operation Temp.	0~+40°C Design assurance
Other	Normal temperature use

Reference picture



Configuration(mm)

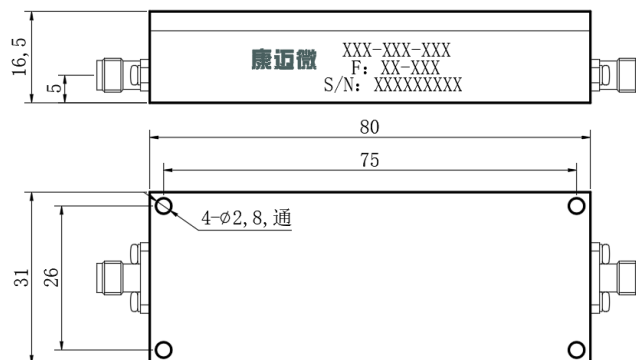

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.