


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2276	~	2288	MHz
Passband IL	/	/			2	dB
Ripple	/	/			1	dB
Rejection	$f_o \pm 56$	MHz $\geq$	35			dBc
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMD
Impedance	50Ω
Power Capacity	2W Design assurance
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Suggested PCB Layout

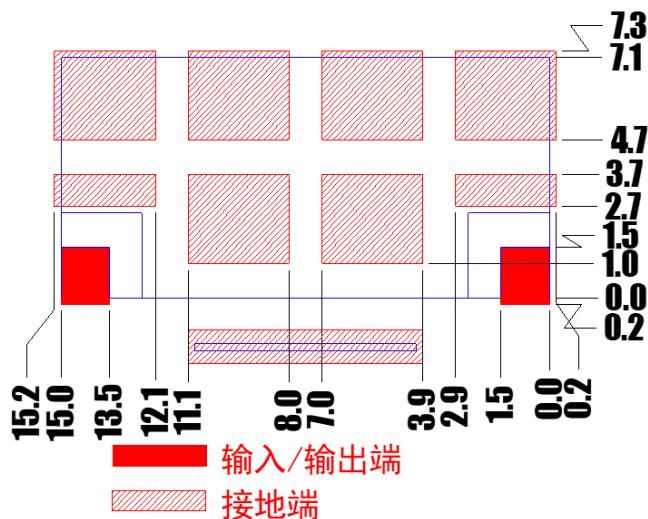

Reference picture



Configuration(mm)

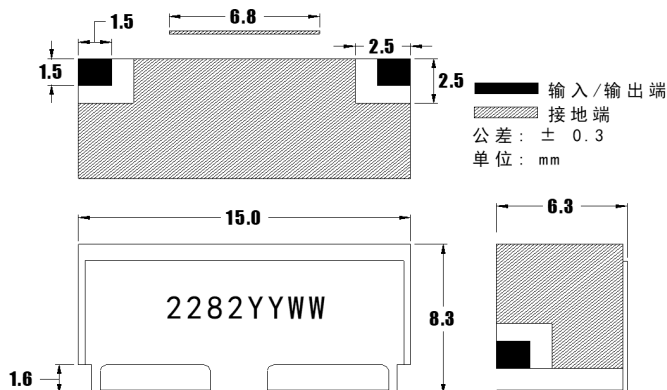

Note

- Short term soaking and cleaning, please dry in a timely manner.
- The product supports 190 °C reflow soldering