


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband RF1	/	/	600	~	700	MHz
Passband RF2	/	/	1200	~	2100	MHz
Passband IL	/	/		1		dB
Passband ripple	/	/		0.6		
Passband VSWR RF1	/	/		1.5		
Passband VSWR RF2	/	/		1.8		
Band 1 Rejection	1200~2100	MHz $\geq$		75		dBc
band 2 Rejection	600~700	MHz $\geq$		75		dBc

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	50W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

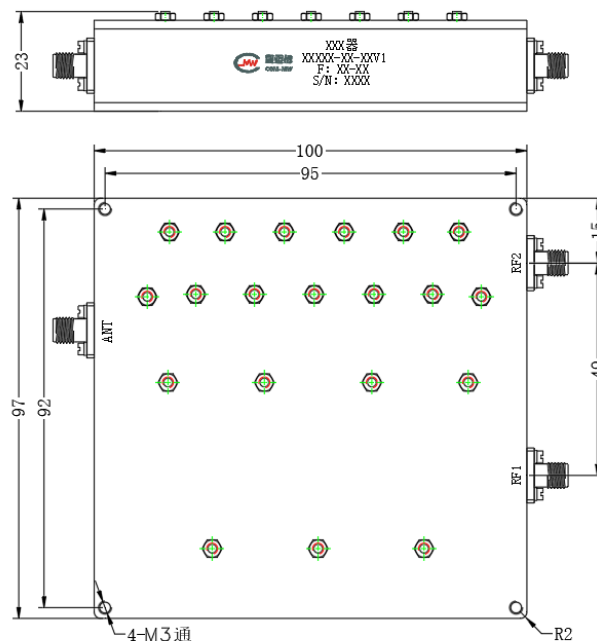

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.