


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	10.7	~	14.5	GHz
Passband IL	/	/			0.6	dB
Rejection	DC-9.5	GHz $\geq$	50			dB
Rejection	15.45-20.2	GHz $\geq$	60			dB
Rejection	20.2-29.7	GHz $\geq$	30			dB
Passband VSWR	/	/			1.5	

Configuration(mm)

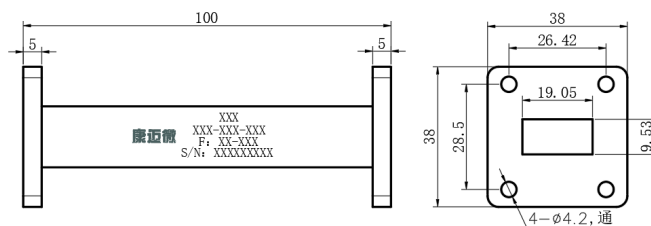

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	Waveguide
Waveguide port	BJ120
Waveguide flange	FBP120
Surface	silver-plate
Power Capacity	30W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade