

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	6.57	~	9.99	GHz
IL			0.2	dB
Coupling	28.5	30	31.5	dB
Directivity	18			dB
Main line VSWR			1.2	
Coupled line VSWR			1.3	


Other parameters

Connector	Waveguide
Power Capacity	300W
Operation Temp.	-55~+85°C Design assurance
Other	In: FDM84, Out: FDP84, Coupling port: N-F

Port Definition

Input port	1
Output port	2
Coupling port	3

Configuration(mm)

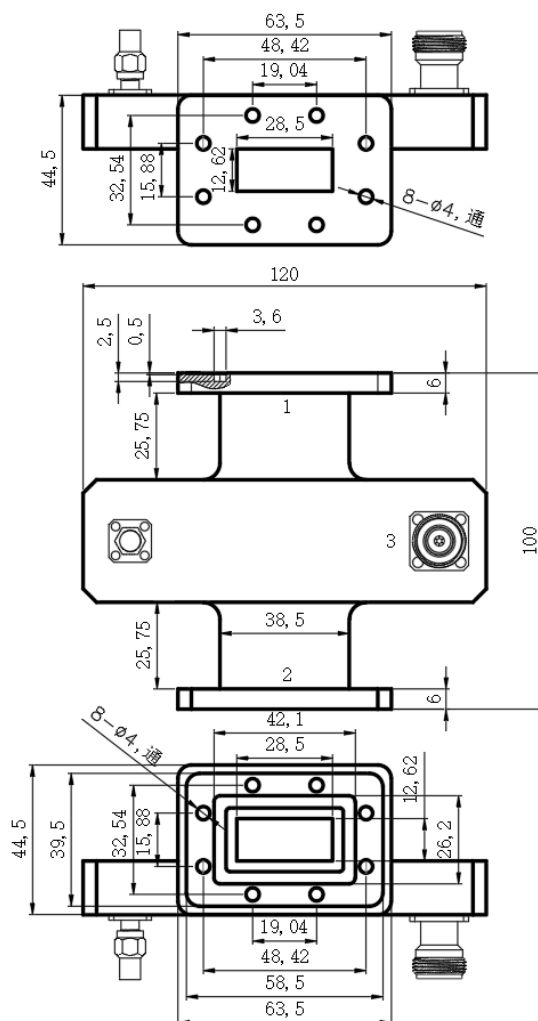

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.