

Product features

High cost performance semi flexible cable components.


Main specifications

Items	Frequency (G)	Min	Type	Max	Units
Frequency		DC	~	26.5	GHz
IL	DC-26.5		20.65	21.86	dB
VSWR	DC-6		1.02	1.15	dB
VSWR	6-12		1.09	1.15	dB
VSWR	12-18		1.15	1.33	dB
VSWR	18-26.5		1.21	1.33	dB

Other parameters

Cable category	Hand-Flex Cable
Length	8000mm
Connector 1	SMA-M Stainless steel
Connector 2	SMA-M Stainless steel
Impedance	50Ω
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-40~+85°C Design assurance

Configuration

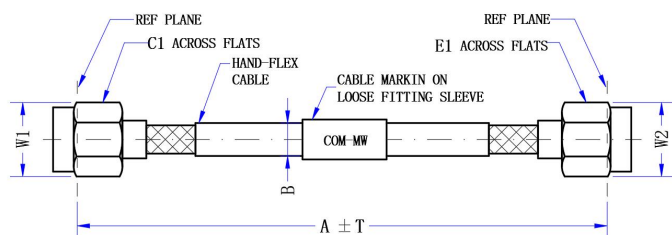

Overall dimensions (mm)

A	8000	mm	C1	8.0	mm
B	4.2	mm	E1	8.0	mm
T	80	mm	W1	8.9	mm
			W2	8.9	mm


Reference picture



Typical test data


Frequency	IL	Input VSWR	Output VSWR
100	0.06	1.01	1.01
1000	3.61	1.03	1.02
2500	5.59	1.04	1.03
4000	7.07	1.03	1.02
5000	8.23	1.05	1.04
6000	9.22	1.04	1.05
7000	9.80	1.05	1.05
8000	10.72	1.06	1.07
9000	11.25	1.08	1.08
10000	12.35	1.11	1.11
12000	13.11	1.10	1.12
15000	15.35	1.13	1.14
18000	17.13	1.14	1.15
20000	18.33	1.16	1.18
26500	21.88	1.20	1.21

Typical test curve

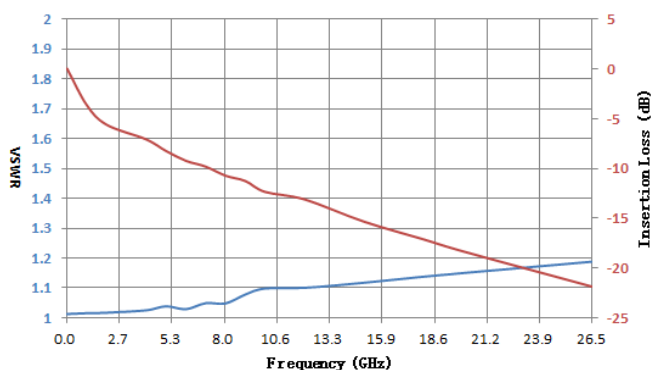


Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Type power curve

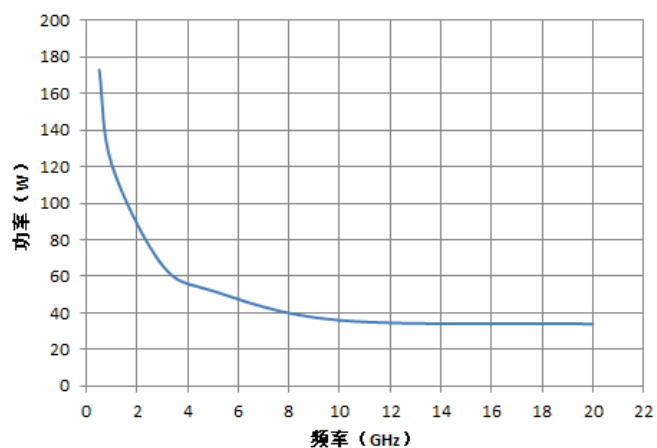

Cable structure diagram

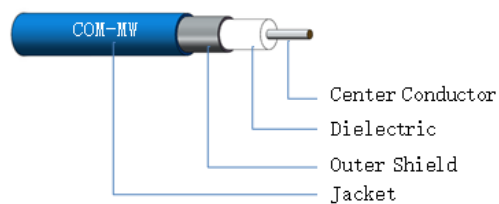

Note

- | | |
|---|---|
| 1 | Suggested installation radius greater than 10mm |
|---|---|